

Gamma Scambiatori

Codice Prodotto	Tipologia Allestimento	Ingombro H	Ventola diam.	Portata Ventola m3/h	M.R. dm3	Potenza Assorbita
RUV100630000	NUDO	45	-	-	4,47	-
RUV100630011	12V Asp.	210	305	1839	4,47	16,5 A
RUV100630012	12V Soff.	210	305	1736	4,47	14,9 A
RUV100630021	24V Asp.	210	305	2161	4,47	10,3 A
RUV100630022	24V Soff.	210	305	2050	4,47	9,1 A
RUV100630031	230V-50/60Hz Asp.	175	300	3745	4,47	1,55 A
RUV100630032	230V-50/60Hz Soff.	175	300	3745	4,47	1,55 A
RUV100630041	230/400V-50/60Hz 3FN Asp.	175	300	3350	4,47	0,48 A
RUV100630042	230/400V-50/60Hz 3FN Soff.	175	300	3350	4,47	0,48 A
RUV100630051	Pred. Hydraulic. Asp. (Supp. G2)	225	300	3080	4,47	0,41 kW
RUV100630052	Pred. Hydraulic. Soff. (Supp. G2)	225	300	3080	4,47	0,41 kW



Dati Tecnici

Range Minimo

Kw 7,5 : 20 lt

Range Massimo

Kw 14 : 120 lt

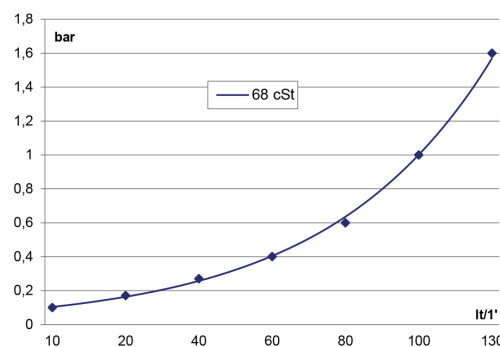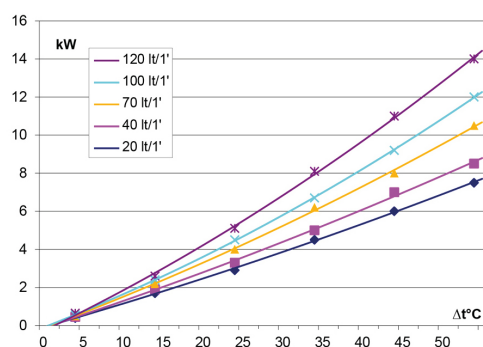

Le dimensioni di ingombro e le caratteristiche tecniche sono da considerarsi indicative, trattandosi di prodotti standard in continua evoluzione.

