

[\*] Piedi rimovibili

### Gamma Scambiatori

Codice Prodotto	Tipologia Allestimento	Ingombro H	Ventola diam.	Portata Ventola m3/h	M.R. dm3	Potenza Assorbita
RU0105680000	NUDO	65	-	-	12,02	-
RU0105680011	12V Asp.	230	305	1839	12,02	16,5 A
RU0105680012	12V Soff.	230	305	1736	12,02	14,9 A
RU0105680021	24V Asp.	230	305	2161	12,02	10,3 A
RU0105680022	24V Soff.	230	305	2050	12,02	9,1 A
RU0105680031	230V-50/60Hz Asp.	190	300	3745	12,02	1,55 A
RU0105680032	230V-50/60Hz Soff.	190	300	3745	12,02	1,55 A
RU0105680041	230/400V-50/60Hz 3FN Asp.	190	300	3350	12,02	0,48 A
RU0105680042	230/400V-50/60Hz 3FN Soff.	190	300	3350	12,02	0,48 A
RU0105680051	Pred. Hydraulic. Asp. (Supp. G2)	245	300	3080	12,02	0,41 kW
RU0105680052	Pred. Hydraulic. Soff. (Supp. G2)	245	300	3080	12,02	0,41 kW



### Dati Tecnici

Range Minimo

Kw 15 : 30 lt

Range Massimo

Kw 25 : 130 lt

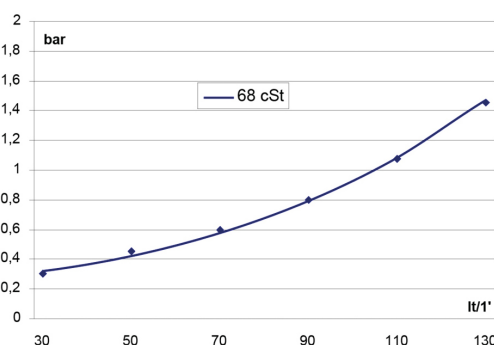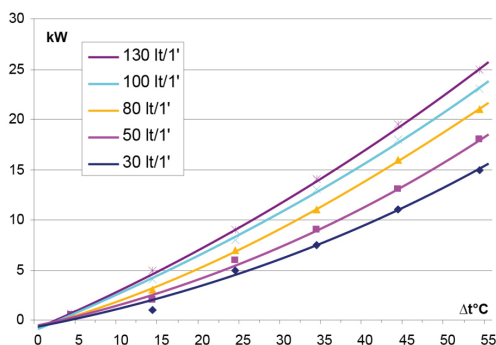

Le dimensioni di ingombro e le caratteristiche tecniche sono da considerarsi indicative, trattandosi di prodotti standard in continua evoluzione.

