

[*] Piedi rimovibili

Gamma Scambiatori

Codice Prodotto	Tipologia Allestimento	Ingombro H	Ventola diam.	Portata Ventola m3/h	M.R. dm3	Potenza Assorbita
RU0105710000	NUDO	95	-	-	36,58	-
RU0105710211	12V Asp.	290	2 x 305	3678	36,58	33,0 A
RU0105710212	12V Soff.	290	2 x 305	3472	36,58	29,8 A
RU0105710221	24V Asp.	290	2 x 305	4322	36,58	20,6 A
RU0105710222	24V Soff.	290	2 x 305	4100	36,58	18,2 A
RU0105710031/32	230V-50/60Hz Asp./Soff.	310	500	9850	36,58	3,88 A
RU0105710231/32	230V-50/60Hz Asp./Soff.	255	2 x 300	7490	36,58	3,1 A
RU0105710041/42	230/400V-50/60Hz 3FN Asp./Soff.	310	500	9195	36,58	1,41 A
RU0105710241/42	230/400V-50/60Hz 3FN Asp./Soff.	255	2 x 300	6700	36,58	0,96 A
RU0105710051	Pred. Hydraulic. Asp. (Supp. G2)	305	500	13300	36,58	4,1 kW
RU0105710052	Pred. Hydraulic. Soff. (Supp. G2)	305	500	13300	36,58	4,1 kW



Dati Tecnici

Range Minimo

Kw 41 : 50 lt

Range Massimo

Kw 65 : 220 lt

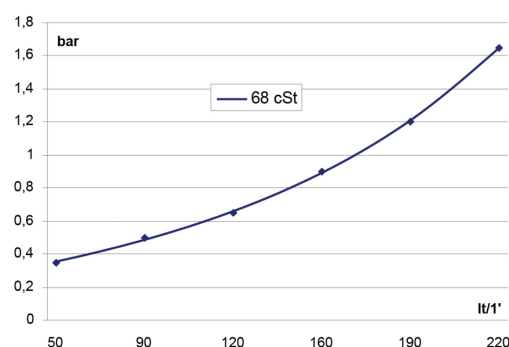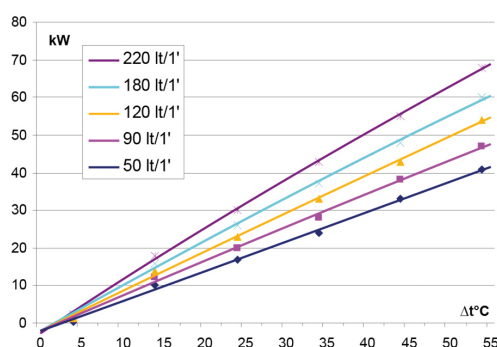

Le dimensioni di ingombro e le caratteristiche tecniche sono da considerarsi indicative, trattandosi di prodotti standard in continua evoluzione.

