

[\*] Piedi rimovibili

### Gamma Scambiatori

Codice Prodotto	Tipologia Allestimento	Ingombro H	Ventola diam.	Portata Ventola m3/h	M.R. dm3	Potenza Assorbita
RU0105740000	NUDO	140	-	-	88,20	-
RU0105740411	12V Asp.	335	4 x 305	7356	88,20	66,0 A
RU0105740412	12V Soff.	335	4 x 305	6944	88,20	59,6 A
RU0105740421	24V Asp.	335	4 x 305	8644	88,20	41,2 A
RU0105740422	24V Soff.	335	4 x 305	8200	88,20	36,4 A
RU0105740031/32	230V-50/60Hz Asp./Soff.	365	630	11025	88,20	2,62 A
RU0105740431/32	230V-50/60Hz Asp./Soff.	295	4 x 300	14980	88,20	6,2 A
RU0105740041/42	230/400V-50/60Hz 3FN Asp./Soff.	365	630	11270	88,20	1,2 A
RU0105740441/42	230/400V-50/60Hz 3FN Asp./Soff.	295	4 x 300	13400	88,20	1,92 A
RU0105740051	Pred. Hydraulic. Asp. (Supp. G2)	370	630	23600	88,20	7,4 kW
RU0105740052	Pred. Hydraulic. Soff. (Supp. G2)	370	630	23600	88,20	7,4 kW



### Dati Tecnici

Range Minimo

Kw 65 : 80 lt

Range Massimo

Kw 92 : 350 lt

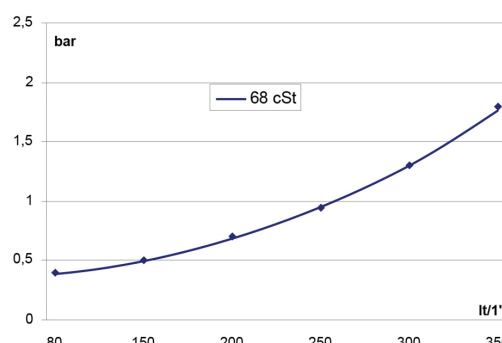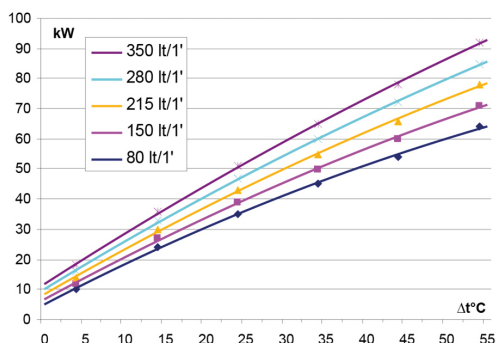

Le dimensioni di ingombro e le caratteristiche tecniche sono da considerarsi indicative, trattandosi di prodotti standard in continua evoluzione.

