

Gamma Scambiatori

| Codice Prodotto | Tipologia Allestimento | Ingombro H | Ventola diam. | Portata Ventola m ³ /h | M.R. dm ³ | Potenza Assorbita |
|-----------------|-----------------------------------|------------|---------------|-----------------------------------|----------------------|-------------------|
| RU0345380000 | NUDO | 65 | - | - | 3,43 | - |
| RU0345380011 | 12V Asp. | 170 | 225 | 689 | 3,43 | 7,2 A |
| RU0345380012 | 12V Soff. | 170 | 225 | 703 | 3,43 | 7,4 A |
| RU0345380021 | 24V Asp. | 170 | 225 | 683 | 3,43 | 3,6 A |
| RU0345380022 | 24V Soff. | 170 | 225 | 736 | 3,43 | 3,7 A |
| RU0345380031 | 230V-50/60Hz Asp. | 165 | 200 | 1025 | 3,43 | 0,34 A |
| RU0345380032 | 230V-50/60Hz Soff. | 165 | 200 | 1025 | 3,43 | 0,34 A |
| RU0345380041 | 230/400V-50/60Hz 3FN Asp. | 165 | 200 | 1020 | 3,43 | 0,13 A |
| RU0345380042 | 230/400V-50/60Hz 3FN Soff. | 165 | 200 | 1020 | 3,43 | 0,13 A |
| RU0345380051 | Pred. Hydraulic. Asp. (Supp. G1) | 215 | 200 | 958 | 3,43 | 0,7 kW |
| RU0345380052 | Pred. Hydraulic. Soff. (Supp. G1) | 215 | 200 | 958 | 3,43 | 0,7 kW |


Dati Tecnici

Range Minimo

Kw 6 : 16 lt

Range Massimo

Kw 16 : 100 lt

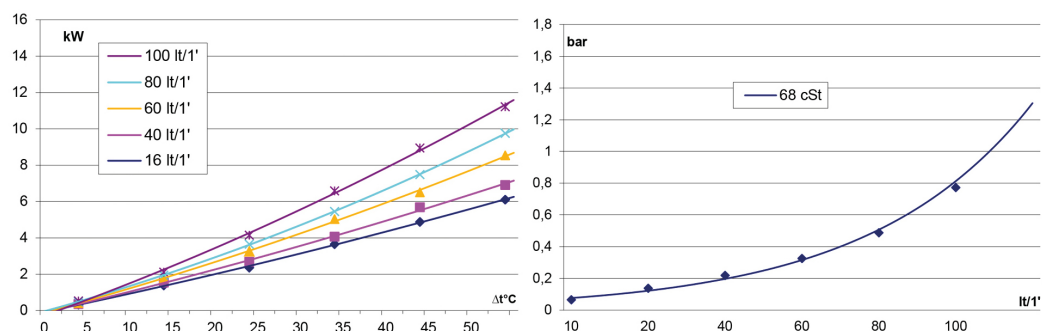

Le dimensioni di ingombro e le caratteristiche tecniche sono da considerarsi indicative, trattandosi di prodotti standard in continua evoluzione.

