


# GRV 850S

## Oil Coolers GRV Series

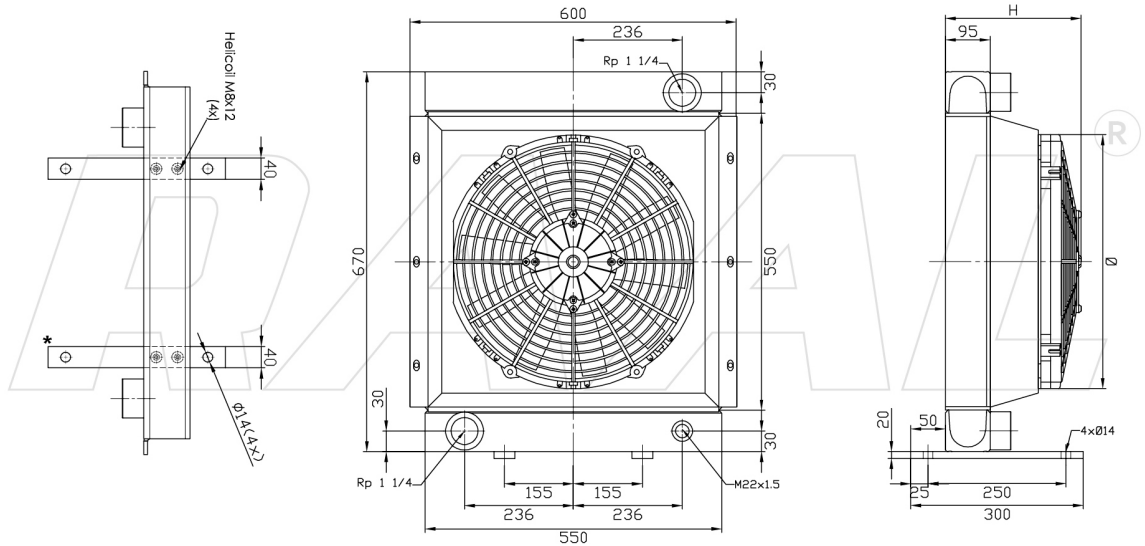

[\*] Removable feet

### Gamma Oil Coolers

Product Code	Type of Setting	Overall H	Fan diameter	Fan Power m3/h	M.R. dm3	Power Consumpt.
RU0105700000	UNCOVERED	95	-	-	28,74	-
RU0105700211	12V Suct.	290	2 x 305	3678	28,74	33,0 A
RU0105700212	12V Blow.	290	2 x 305	3472	28,74	29,8 A
RU0105700221	24V Suct.	290	2 x 305	4322	28,74	20,6 A
RU0105700222	24V Blow.	290	2 x 305	4100	28,74	18,2 A
RU0105700031/32	230V-50/60Hz Suct./Blow.	310	500	9850	28,74	3,88 A
RU0105700231/32	230V-50/60Hz Suct./Blow.	255	2 x 300	7490	28,74	3,1 A
RU0105700041/42	230/400V-50/60Hz 3FN Suct./Blow.	310	500	9195	28,74	1,41 A
RU0105700241/42	230/400V-50/60Hz 3FN Suct./Blow.	255	2 x 300	6700	28,74	0,96 A
RU0105700051	Pred. Hydraulic. Suct. (Supp. G2)	305	500	13300	28,74	4,1 kW
RU0105700052	Pred. Hydraulic. Blow. (Supp. G2)	305	500	13300	28,74	4,1 kW



### Technical Specification

Minimum Range

Kw 26 : 40 lt

Maximum Range

Kw 44 : 200 lt

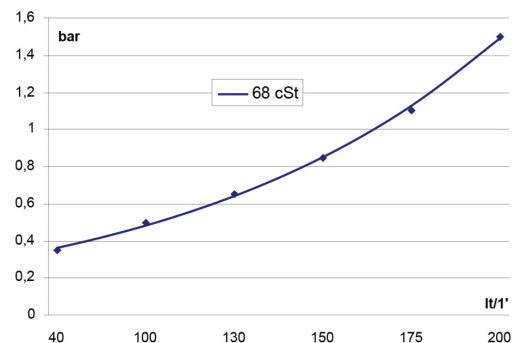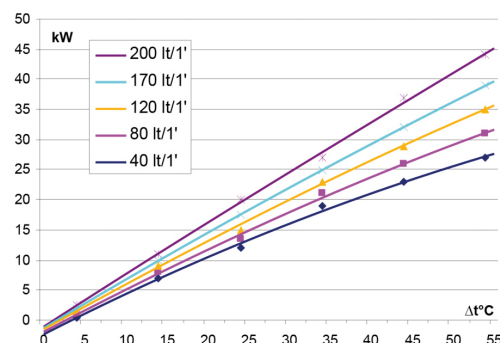

The overall dimensions and the technical characteristics are to be considered indicative, dealing with standard products in constant evolution.

