

[*] Not removable feet

Gamma Oil Coolers

Product Code	Type of Setting	Overall H	Fan diameter	Fan Power m3/h	M.R. dm3	Power Consumpt.
RUT105700000	UNCOVERED	98	-	-	21,06	-
RUT105700011	12V Suct.	265	385	2212	21,06	16,0 A
RUT105700012	12V Blow.	265	385	2412	21,06	16,2 A
RUT105700021	24V Suct.	265	385	2577	21,06	9,3 A
RUT105700022	24V Blow.	265	385	2609	21,06	9,0 A
RUT105700031	230V-50/60Hz Suct.	270	400	4950	21,06	1,06 A
RUT105700032	230V-50/60Hz Blow.	270	400	4950	21,06	1,06 A
RUT105700041	230/400V-50/60Hz 3FN Suct.	270	400	4615	21,06	0,39 A
RUT105700042	230/400V-50/60Hz 3FN Blow.	270	400	4615	21,06	0,39 A
RUT105700051	Pred. Hydraulic. Suct. (Supp. G2)	285	400	7050	21,06	1,5 kW
RUT105700052	Pred. Hydraulic. Blow. (Supp. G2)	285	400	7050	21,06	1,5 kW



Technical Specification

Minimum Range

Kw 25 : 40 lt

Maximum Range

Kw 37 : 200 lt

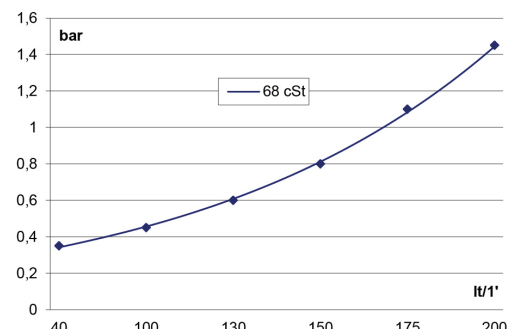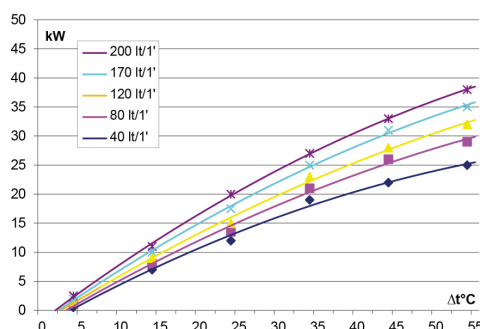

The overall dimensions and the technical characteristics are to be considered indicative, dealing with standard products in constant evolution.

