

[*] Not removable feet

Gamma Oil Coolers

Product Code	Type of Setting	Overall H	Fan diameter	Fan Power m3/h	M.R. dm3	Power Consumpt.
RUT105710000	UNCOVERED	95	-	-	33,47	-
RUT105710211	12V Suct.	260	2 x 305	3678	33,47	33,0 A
RUT105710212	12V Blow.	260	2 x 305	3472	33,47	29,8 A
RUT105710221	24V Suct.	260	2 x 305	4322	33,47	20,6 A
RUT105710222	24V Blow.	260	2 x 305	4100	33,47	18,2 A
RUT105710031/32	230V-50/60Hz Suct./Blow.	310	500	9850	33,47	3,88 A
RUT105710231/32	230V-50/60Hz Suct./Blow.	225	2 x 300	6820	33,47	3,1 A
RUT105710041/42	230/400V-50/60Hz 3FN Suct./Blow.	310	500	9195	33,47	1,41 A
RUT105710241/42	230/400V-50/60Hz 3FN Suct./Blow.	225	2 x 300	6700	33,47	0,96 A
RUT105710051	Pred. Hydraulic. Suct. (Supp. G2)	305	500	13300	33,47	4,1 kW
RUT105710052	Pred. Hydraulic. Blow. (Supp. G2)	305	500	13300	33,47	4,1 kW



Technical Specification

Minimum Range

Kw 40 : 50 lt

Maximum Range

Kw 68 : 220 lt

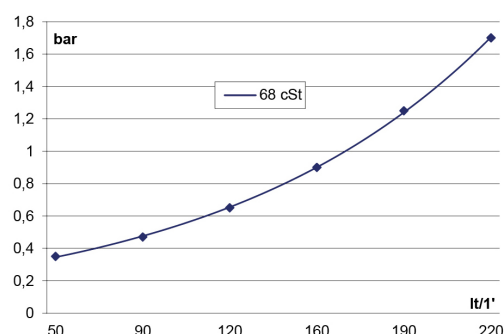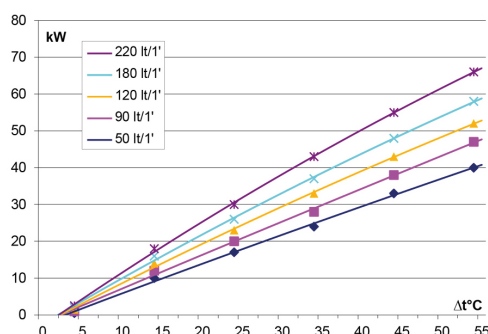

The overall dimensions and the technical characteristics are to be considered indicative, dealing with standard products in constant evolution.

