

[\*] Piedi rimovibili

### Gamma Scambiatori

Codice Prodotto	Tipologia Allestimento	Ingombro H	Ventola diam.	Portata Ventola m3/h	M.R. dm3	Potenza Assorbita
RU0105730000	NUDO	95	-	-	59,85	-
RU0105730411	12V Asp.	290	4 x 305	7356	59,85	66,0 A
RU0105730412	12V Soff.	290	4 x 305	6944	59,85	59,6 A
RU0105730421	24V Asp.	290	4 x 305	8644	59,85	41,2 A
RU0105730422	24V Soff.	290	4 x 305	8200	59,85	36,4 A
RU0105730031/32	230V-50/60Hz Asp./Soff.	320	630	11025	59,85	2,62 A
RU0105730431/32	230V-50/60Hz Asp./Soff.	255	4 x 300	14980	59,85	6,2 A
RU0105730041/42	230/400V-50/60Hz 3FN Asp./Soff.	320	630	11270	59,85	1,2 A
RU0105730441/42	230/400V-50/60Hz 3FN Asp./Soff.	255	4 x 300	13400	59,85	1,92 A
RU0105730051	Pred. Hydraulic. Asp. (Supp. G2)	325	630	23600	59,85	7,4 kW
RU0105730052	Pred. Hydraulic. Soff. (Supp. G2)	325	630	23600	59,85	7,4 kW



### Dati Tecnici

Range Minimo

Kw 58 : 60 lt

Range Massimo

Kw 78 : 280 lt

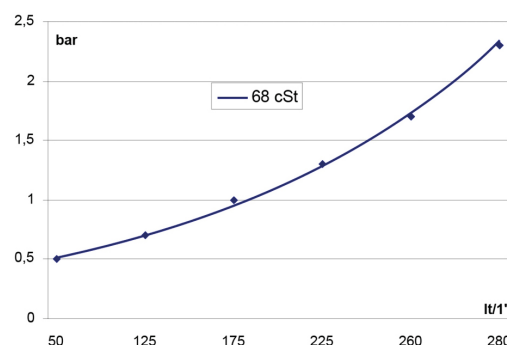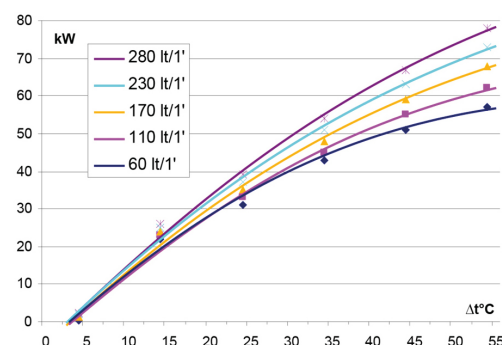

Le dimensioni di ingombro e le caratteristiche tecniche sono da considerarsi indicative, trattandosi di prodotti standard in continua evoluzione.

