

[*] Piedi non rimovibili

Gamma Scambiatori

Codice Prodotto	Tipologia Allestimento	Ingombro H	Ventola diam.	Portata Ventola m3/h	M.R. dm3	Potenza Assorbita
RUT105690000	NUDO	98	-	-	14,70	-
RUT105690011	12V Asp.	265	305	1839	14,70	16,5 A
RUT105690012	12V Soff.	265	305	1736	14,70	14,9 A
RUT105690021	24V Asp.	265	305	2161	14,70	10,3 A
RUT105690022	24V Soff.	265	305	2050	14,70	9,1 A
RUT105690031	230V-50/60Hz Asp.	225	300	3745	14,70	1,55 A
RUT105690032	230V-50/60Hz Soff.	225	300	3745	14,70	1,55 A
RUT105690041	230/400V-50/60Hz 3FN Asp.	225	300	3350	14,70	0,48 A
RUT105690042	230/400V-50/60Hz 3FN Soff.	225	300	3350	14,70	0,48 A
RUT105690051	Pred. Hydraulic. Asp. (Supp. G2)	280	300	3080	14,70	0,41 kW
RUT105690052	Pred. Hydraulic. Soff. (Supp. G2)	280	300	3080	14,70	0,41 kW



Dati Tecnici

Range Minimo

Kw 22 : 30 lt

Range Massimo

Kw 34 : 170 lt

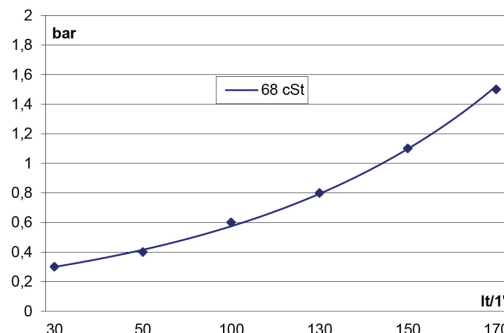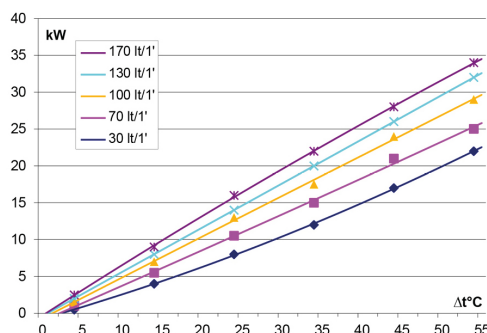

Le dimensioni di ingombro e le caratteristiche tecniche sono da considerarsi indicative, trattandosi di prodotti standard in continua evoluzione.

