

[\*] Piedi non rimovibili

## Gamma Scambiatori

Codice Prodotto	Tipologia Allestimento	Ingombro H	Ventola diam.	Portata Ventola m3/h	M.R. dm3	Potenza Assorbita
RUT105730000	NUDO	95	-	-	41,25	-
RUT105730211	12V Asp.	290	2 x 305	3678	41,25	33,0 A
RUT105730212	12V Soff.	290	2 x 305	3472	41,25	29,8 A
RUT105730221	24V Asp.	290	2 x 305	4322	41,25	20,6 A
RUT105730222	24V Soff.	290	2 x 305	4100	41,25	18,2 A
RUT105730031/32	230V-50/60Hz Asp./Soff.	310	500	9850	41,25	3,88 A
RUT105730231/32	230V-50/60Hz Asp./Soff.	255	2 x 300	6820	41,25	3,1 A
RUT105730041/42	230/400V-50/60Hz 3FN Asp./Soff.	310	500	9195	41,25	1,41 A
RUT105730241/42	230/400V-50/60Hz 3FN Asp./Soff.	255	2 x 300	6700	41,25	0,96 A
RUT105730051	Pred. Hydraulic. Asp. (Supp. G2)	305	500	13300	41,25	4,1 kW
RUT105730052	Pred. Hydraulic. Soff. (Supp. G2)	305	500	13300	41,25	4,1 kW



## Dati Tecnici

Range Minimo

Kw 48 : 60 lt

Range Massimo

Kw 62 : 280 lt

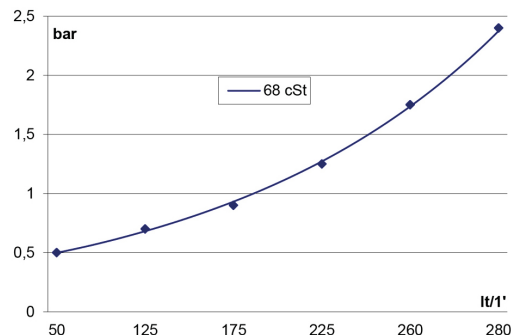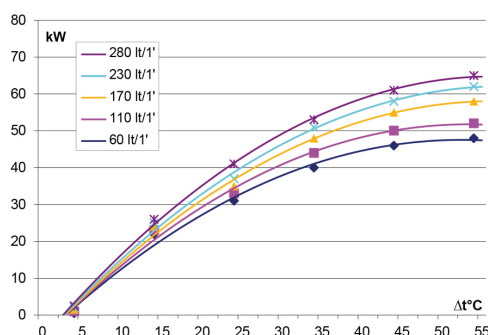

Le dimensioni di ingombro e le caratteristiche tecniche sono da considerarsi indicative, trattandosi di prodotti standard in continua evoluzione.

