

[\*] Piedi non rimovibili

## Gamma Scambiatori

Codice Prodotto	Tipologia Allestimento	Ingombro H	Ventola diam.	Portata Ventola m3/h	M.R. dm3	Potenza Assorbita
RUT105740000	NUDO	140	-	-	59,85	-
RUT105740411	12V Asp.	335	4 x 305	7356	59,85	66,0 A
RUT105740412	12V Soff.	335	4 x 305	6944	59,85	59,6 A
RUT105740421	24V Asp.	335	4x305	8644	59,85	41,2 A
RUT105740422	24V Soff.	335	4 x 305	8200	59,85	36,4 A
RUT105740031/32	230V-50/60Hz Asp./Soff.	365	630	18000	59,85	3,5 A
RUT105740431/32	230V-50/60Hz Asp./Soff.	295	4 x 300	14980	59,85	6,2 A
RUT105740041/42	230/400V-50/60Hz 3FN Asp./Soff.	365	630	19000	59,85	1,29 A
RUT105740441/42	230/400V-50/60Hz 3FN Asp./Soff.	295	4 x 300	13400	59,85	1,92 A
RUT105740051	Pred. Hydraulic. Asp. (Supp. G2)	370	630	23600	59,85	7,4 kW
RUT105740052	Pred. Hydraulic. Soff. (Supp. G2)	370	630	23600	59,85	7,4 kW



## Dati Tecnici

Range Minimo

Kw 52 : 80 lt

Range Massimo

Kw 80 : 350 lt

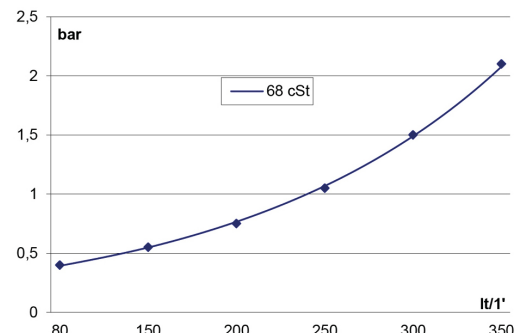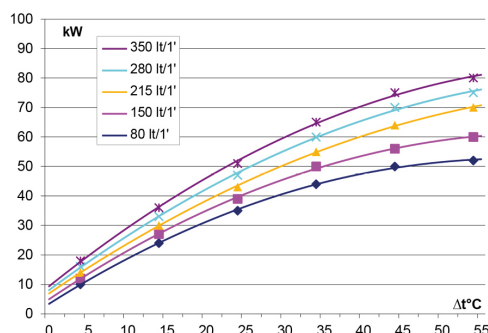

Le dimensioni di ingombro e le caratteristiche tecniche sono da considerarsi indicative, trattandosi di prodotti standard in continua evoluzione.

