

Gamma Oil Coolers

Product Code	Type of Setting	Overall H	Fan diameter	Fan Power m3/h	M.R. dm3	Power Consumpt.
RUV100610000	UNCOVERED	45	-	-	1,91	-
RUV100610011	12V Suct.	140	190	446	1,91	6,4 A
RUV100610012	12V Blow.	140	190	497	1,91	6,4 A
RUV100610021	24V Suct.	140	190	419	1,91	2,8 A
RUV100610022	24V Blow.	140	190	505	1,91	3,3 A
RUV100610031	230V-50/60Hz Suct.	135	200	1025	1,91	0,34 A
RUV100610032	230V-50/60Hz Blow.	135	200	1025	1,91	0,13 A
RUV100610041	230/400V-50/60Hz 3FN Suct.	135	200	1020	1,91	0,13 A
RUV100610042	230/400V-50/60Hz 3FN Blow.	135	200	1020	1,91	0,30 A
RUV100610051	Pred. Hydraulic. Suct. (Supp. G2)	185	195	958	1,91	0,7 kW
RUV100610052	Pred. Hydraulic. Blow. (Supp. G2)	185	195	958	1,91	0,7 kW



Technical Specification

Minimum Range

Kw 3,1 : 10 lt

Maximum Range

Kw 6 : 80 lt

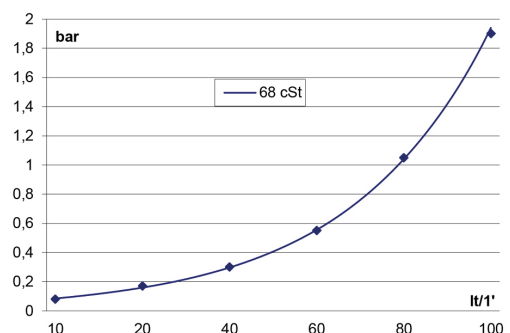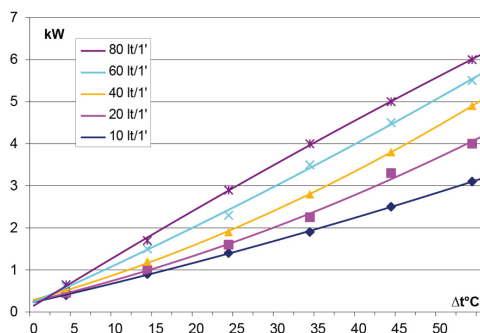

The overall dimensions and the technical characteristics are to be considered indicative, dealing with standard products in constant evolution.

