

[\*] SINGLE CIRCUIT version: the cooler is delivered only with SINGLE CIRCUIT configuration. The DOUBLE CIRCUIT only at specific request of the customer.

### Gamma Oil Coolers

Product Code	Type of Setting	Overall H	Fan diameter	Fan Power m3/h	M.R. dm3	Power Consumpt.
RU020112B000	UNCOVERED	45	-	-	4,24	-
RU020112B011	12V Suct.	210	305	1839	4,24	16,5 A
RU020112B012	12V Blow.	210	305	1736	4,24	14,9 A
RU020112B021	24V Suct.	210	305	2161	4,24	10,3 A
RU020112B022	24V Blow.	210	305	2050	4,24	9,1 A
RU020112B031 [*]	230V-50/60Hz Suct.	175	300	3745	4,24	1,55 A
RU020112B032 [*]	230V-50/60Hz Blow.	175	300	3745	4,24	1,55 A
RU020112B041	230/400V-50/60Hz 3FN Suct.	175	300	3350	4,24	0,48 A
RU020112B042	230/400V-50/60Hz 3FN Blow.	175	300	3350	4,24	0,48 A
RU020112B051	Pred. Hydraulic. Suct. (Supp. G2)	225	300	3080	4,24	0,41 kW
RU020112B052	Pred. Hydraulic. Blow. (Supp. G2)	225	300	3080	4,24	0,41 kW

[\*] In SINGLE PHASE models (\*31/\*32), ADJUSTABLE THERMOSTAT 0-90° on request.



### Technical Specification

Minimum Range

Maximum Range

Kw 7,5 : 20 lt

Kw 14 : 120 lt

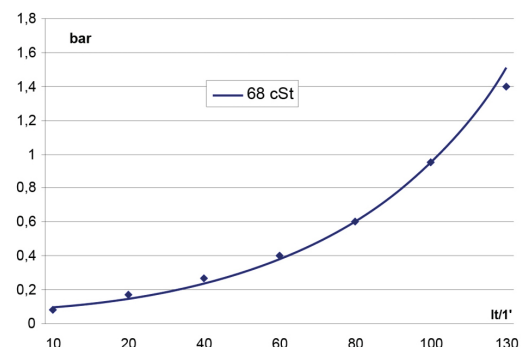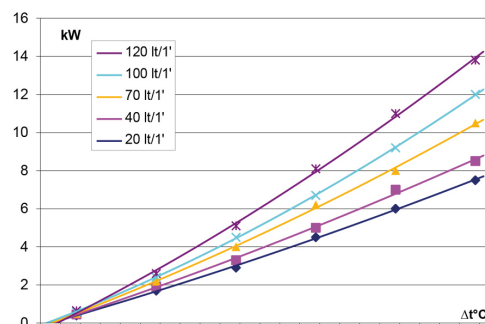

The overall dimensions and the technical characteristics are to be considered indicative, dealing with standard products in constant evolution.

