


By-Pass GRS/D 200

Oil Coolers By-Pass Series

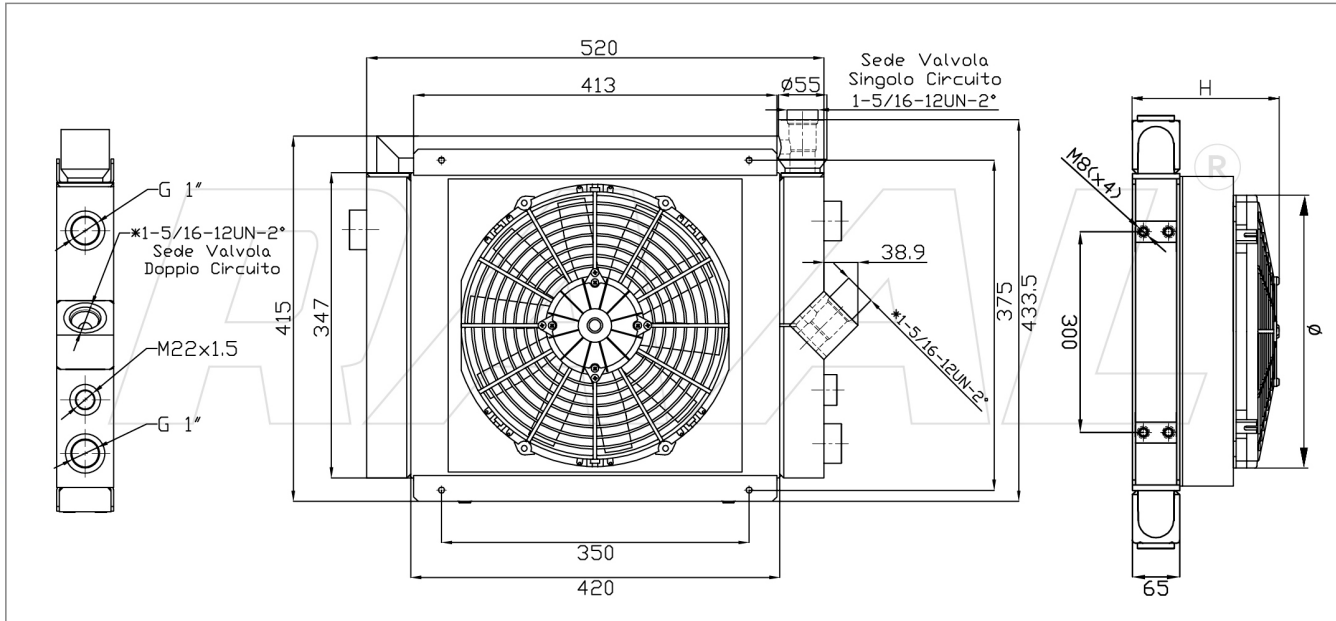

[*] SINGLE CIRCUIT version: the cooler is delivered only with SINGLE CIRCUIT configuration. The DOUBLE CIRCUIT only at specific request of the customer.

Gamma Oil Coolers

Product Code	Type of Setting	Overall H	Fan diameter	Fan Power m3/h	M.R. dm3	Power Consumpt.
RU019458B000	UNCOVERED	65	-	-	9,47	-
RU019458B011	12V Suct.	220	305	1839	9,47	16,5 A
RU019458B012	12V Blow.	220	305	1736	9,47	14,9 A
RU019458B021	24V Suct.	220	305	2161	9,47	10,3 A
RU019458B022	24V Blow.	220	305	2050	9,47	9,1 A
RU019458B031 [*]	230V-50/60Hz Suct.	180	300	3745	9,47	1,55 A
RU019458B032 [*]	230V-50/60Hz Blow.	180	300	3745	9,47	1,55 A
RU019458B041	230/400V-50/60Hz 3FN Suct.	180	300	3350	9,47	0,48 A
RU019458B042	230/400V-50/60Hz 3FN Blow.	180	300	3350	9,47	0,48 A
RU019458B051	Pred. Hydraulic. Suct. (Supp. G2)	235	300	3080	9,47	0,41 kW
RU019458B052	Pred. Hydraulic. Blow. (Supp. G2)	235	300	3080	9,47	0,41 kW

[*] In SINGLE PHASE models (*31/*32), ADJUSTABLE THERMOSTAT 0-90° on request.



Technical Specification

Minimum Range

Maximum Range

Kw 16 : 60 lt

Kw 27 : 160 lt

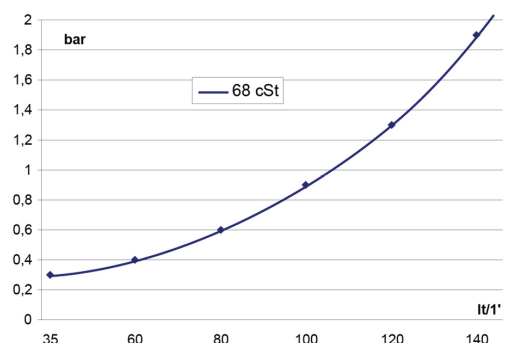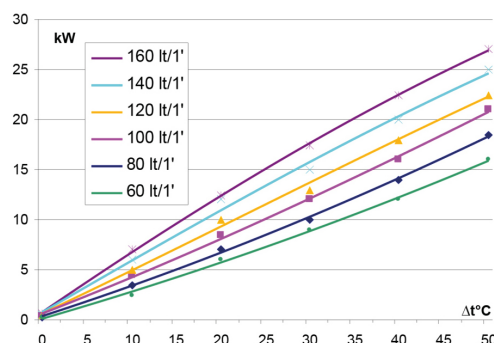

The overall dimensions and the technical characteristics are to be considered indicative, dealing with standard products in constant evolution.

