


GRD 200

Oil Coolers GR S/D Series

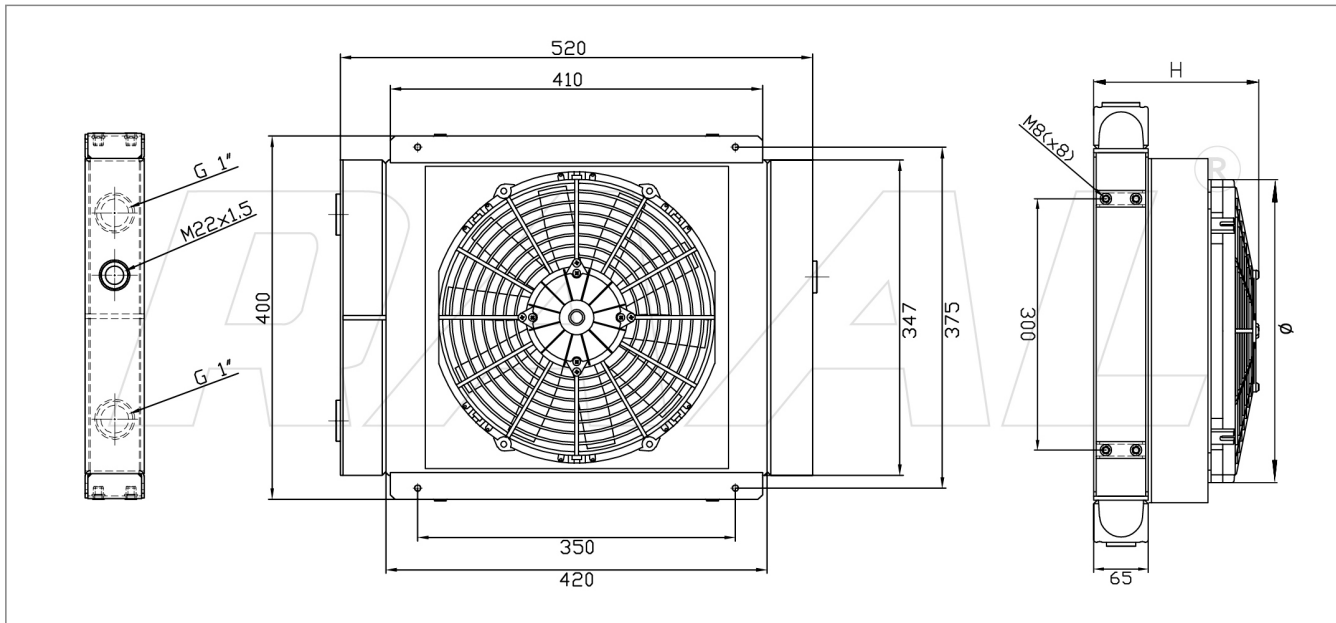

Gamma Oil Coolers

Product Code	Type of Setting	Overall H	Fan diameter	Fan Power m3/h	M.R. dm3	Power Consumpt.
RU0100680000	UNCOVERED	65	-	-	9,47	-
RU0100680011	12V Suct.	220	305	1839	9,47	16,5 A
RU0100680012	12V Blow.	220	305	1736	9,47	14,9 A
RU0100680021	24V Suct.	220	305	2161	9,47	10,3 A
RU0100680022	24V Blow.	220	305	2050	9,47	9,1 A
RU0100680031 [*]	230V-50/60Hz Suct.	180	300	3745	9,47	1,55 A
RU0100680032 [*]	230V-50/60Hz Blow.	180	300	3745	9,47	1,55 A
RU0100680041	230/400V-50/60Hz 3FN Suct.	180	300	3350	9,47	0,48 A
RU0100680042	230/400V-50/60Hz 3FN Blow.	180	300	3350	9,47	0,48 A
RU0100680051	Pred. Hydraulic. Suct. (Supp. G2)	235	300	3080	9,47	0,41 kW
RU0100680052	Pred. Hydraulic. Blow. (Supp. G2)	235	300	3080	9,47	0,41 kW

[*] In SINGLE PHASE models (*31/*32), ADJUSTABLE THERMOSTAT 0-90° on request.



Technical Specification

Minimum Range

Kw 14 : 20 lt

Maximum Range

Kw 23 : 80 lt

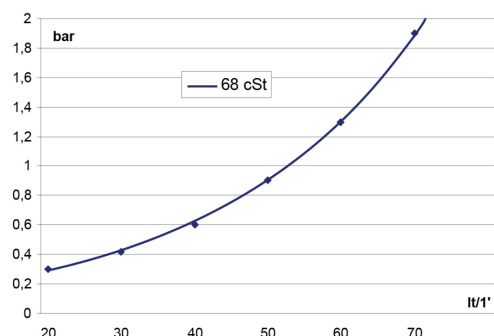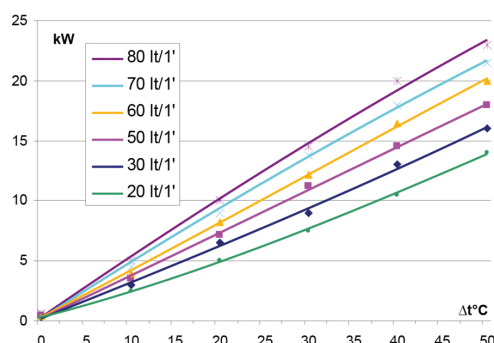

The overall dimensions and the technical characteristics are to be considered indicative, dealing with standard products in constant evolution.

